


ADAPTADO Pta. Lisa / Macho SAE O-Ring Boss(fixo)

AMA X UNF

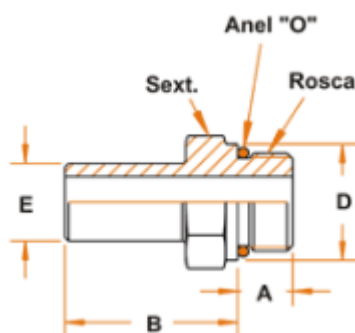

Pressão Nom.(bar)	E - Dia. Ext. Tubo	Rôscas UNF(UN)-2A	A	B	D	Sext.
400	6	7/16"-20	9	26	16	17
400	6	9/16"-18	10	26	17.6	19
400	8	7/16"-20	9	26	16	17
400	8	1/2"-20	9	26	17	17
400	10	7/16"-20	9	26.5	16	17
400	10	9/16"-18	10	26.5	17.6	19
630	12	9/16"-18	10	31.5	17.6	19
630	12	3/4"-16	11	34.5	22.3	24
630	14	3/4"-16	11	36	22.3	24
400	15	3/4"-16	11	30	22.3	24
400	16	3/4"-16	11	36.5	22.3	24
400	16	7/8"-14	12.7	36.8	25.5	27
315	18	3/4"-16	11	30.5	22.3	24
315	18	7/8"-14	12.7	31.8	25.5	27
400	20	3/4"-16	11	41	22.3	24
400	20	7/8"-14	12.7	41.3	25.5	27
400	20	1.1/16"-12	15	43	31.9	32
315	22	7/8"-14	12.7	32.3	25.5	27
315	22	1.1/16"-12	15	32	31.9	32
315	22	1.5/16"-12	15	33	38.2	41

Pressão Nom.(bar)	E - Dia. Ext. Tubo	Rôscas UNF(UN)-2A	A	B	D	Sext.
400	25	1.1/16"-12	15	46	31.9	32
400	25	1.5/16"-12	15	48	38.2	41
250	28	1.1/16"-12	15	33.5	31.9	32
250	28	1.5/16"-12	15	34.5	38.2	41
400	30	1.5/16"-12	15	51	38.2	41
400	30	1.5/8"-12	15	51	48	50
250	35	1.5/16"-12	15	39.5	38.2	41
250	35	1.5/8"-12	15	40.5	48	50
315	38	1.5/8"-12	15	55	48	50
315	38	1.7/8"-12	15	58	55	55
250	42	1.5/8"-12	15	42	48	50
250	42	1.7/8"-12	15	44	55	55