


## ADAPTADOR MACHO BSP C/ JUNTA DE COBRE / FÊMEA BSP (S/SAÍDA) – MFA X BSP

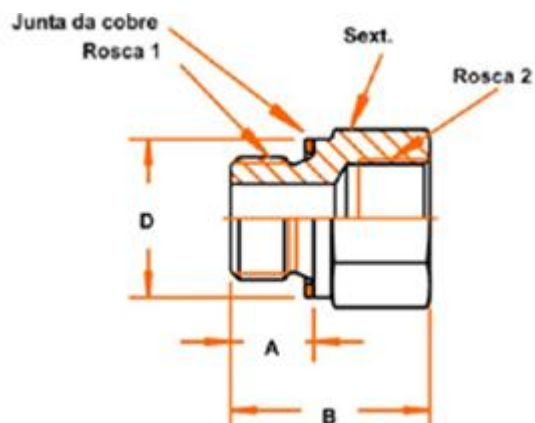

| Série  | Pressão (bar) | Diam. ext tubo | A  | B    | C    | Sext. |
|--------|---------------|----------------|----|------|------|-------|
| Leve   | 400           | 6              | 27 | 12   | 26   | 14    |
| L      | 400           | 8              | 29 | 14   | 27.5 | 17    |
| L      | 400           | 10             | 30 | 15   | 29   | 19    |
| L      | 400           | 12             | 32 | 17   | 29.5 | 22    |
| L      | 400           | 15             | 36 | 21   | 32.5 | 27    |
| L      | 315           | 18             | 40 | 23.5 | 35.5 | 32    |
| L      | 315           | 22             | 44 | 27.5 | 38.5 | 36    |
| L      | 250           | 28             | 47 | 30.5 | 41.5 | 41    |
| L      | 250           | 35             | 56 | 34.5 | 51   | 50    |
| L      | 250           | 42             | 63 | 40   | 56   | 60    |
| Pesada | 630           | 6              | 31 | 16   | 27   | 17    |
| P      | 630           | 8              | 32 | 17   | 27.5 | 19    |
| P      | 630           | 10             | 34 | 17.5 | 30   | 22    |
| P      | 630           | 12             | 38 | 21.5 | 31   | 24    |
| P      | 630           | 14             | 40 | 22   | 35   | 27    |
| P      | 400           | 16             | 43 | 24.5 | 36.5 | 30    |
| P      | 400           | 20             | 48 | 26.5 | 44.5 | 36    |
| P      | 400           | 25             | 54 | 30   | 50   | 46    |
| P      | 400           | 30             | 62 | 35.5 | 55   | 50    |
| P      | 315           | 38             | 72 | 41   | 63   | 60    |