


ADAPTADOR MACHO JIC 37°- BSP PARALELA (c/Junta de cobre)

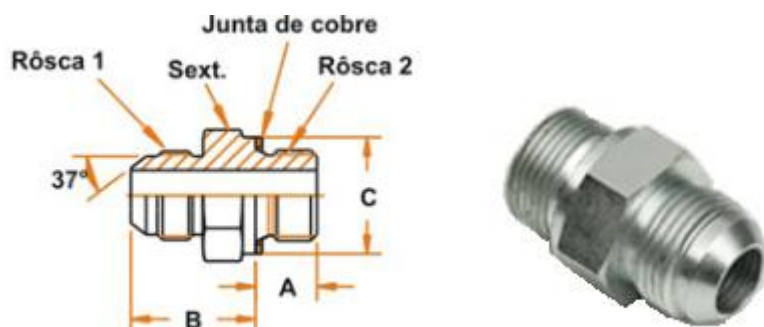

Rôscas 1 UNF/UN(2A)	Rôscas 2 BSP	A	B	C	Sext.
7/16"-20	1/8"-28	8	22,5	13,7	14
7/16"-20	1/4"-19	12	22,5	18,7	19
7/16"-20	3/8"-19	12	23,5	21,7	22
1/2"-20	1/4"-19	12	22,5	18,7	19
1/2"-20	3/8"-19	12	23,5	21,7	22
9/16"-18	1/4"-19	12	22,5	18,7	19
9/16"-18	3/8"-19	12	23,5	21,7	22
9/16"-18	1/2"-14	14	25,6	26,7	27
3/4"-16	1/4"-19	12	26,5	18,7	22
3/4"-16	3/8"-19	12	26,5	21,7	22
3/4"-16	1/2"-14	14	28,4	26,7	27
3/4"-16	3/4"-14	16	29,4	31,7	32
7/8"-14	3/8"-19	12	29,5	21,7	24
7/8"-14	1/2"-14	14	31	26,7	27
7/8"-14	3/4"-14	16	32	31,7	32
1, 1/16"-12	3/8"-19	12	33,2	21,7	30
1, 1/16"-12	1/2"-14	14	33,7	26,7	30
1, 1/16"-12	3/4"-14	16	34,5	31,7	32
1, 1/16"-12	1"-11	18	36,5	39,7	41
1, 5/16"-12	3/4"-14	16	35,5	31,7	36
1, 5/16"-12	1"-11	18	37,5	39,7	41
1, 5/16"-12	1, 1/4"-11	20	39	49,7	50
1, 5/8"-12	1"-11	18	34	39,7	46
1, 5/8"-12	1, 1/4"-11	20	41	49,7	50
1, 7/8"-12	1.1/4"-11	20	44,5	49,7	50
1, 7/8"-12	1.1/2"-11	22	45	54,7	55