


# ADAPTADOR MACHO ORFS x SAE O'ring Boss

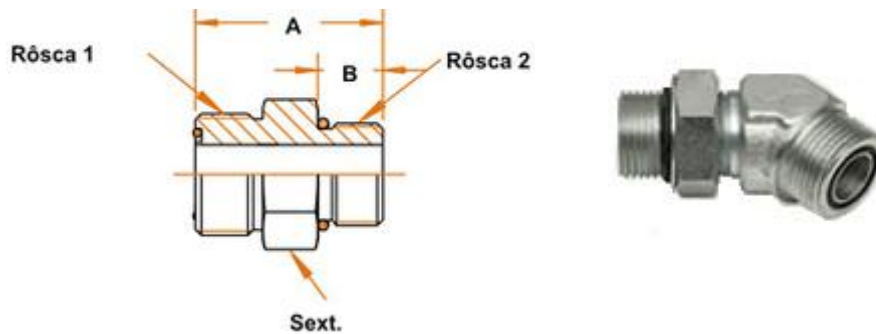

Rôscas 1 UNF/UN(2A)	Rôscas 2 UNF/UN(2A)	A	B	Sext.
9/16"-18	7/16"-20	28.7	10.9	5/8"
9/16"-18	1/2"-20	28.7	10.9	5/8"
9/16"-18	9/16"-18	30.5	11.9	11/16"
9/16"-18	3/4"-16	33.5	14	7/8"
11/16"-16	7/16"-20	34	10.9	3/4"
11/16"-16	1/2"-20	31	10.9	3/4"
11/16"-16	9/16"-18	32	11.9	3/4"
11/16"-16	3/4"-16	35.1	14	7/8"
11/16"-16	7/8"-14	38.9	16	1"
11/16"-16	1,1/16"-12	42.9	18.5	1,1/4"
11/16"-16	1,5/16"-12	43.9	18.5	1,1/2"
13/16"-16	9/16"-18	37.6	11.9	7/8"
13/16"-16	3/4"-16	36.6	14	7/8"
13/16"-16	7/8"-14	40.4	16	1"
13/16"-16	1,1/16"-12	44.5	18.5	1,1/4"
13/16"-16	1,3/16"-12	44.5	18.5	1,3/8"
13/16"-16	1,5/16"-12	45.5	18.5	1,1/2"
1"-14	3/4"-16	45.2	14	1,1/16"
1"-14	7/8"-14	43.2	16	1,1/16"
1"-14	1,1/16"-12	47.2	18.5	1,1/4"
1"-14	1,3/16"-12	47.2	18.5	1,3/8"
1"-14	1,5/16"-12	48.3	18.5	1,1/2"

Rôca 1 UNF/UN(2A)	Rôca 2 UNF/UN(2A)	A	B	Sext.
1,3/16"-12	9/16"-18	45	11.9	1,1/4"
1,3/16"-12	3/4"-16	48.5	14	1,1/4"
1,3/16"-12	7/8"14	50.5	16	1,1/4"
1,3/16"-12	1,1/16"-12	48.8	18.5	1,1/4"
1,3/16"-12	1,3/16"-12	48.8	18.5	1,3/8"
1,3/16"-12	1,5/16"-12	49.8	18.5	1,1/2"
1,7/16"-12	3/4"-16	49.8	14	1,1/2"
1,7/16"-12	7/8"14	51.8	16	1,1/2"
1,7/16"-12	1,1/16"-12	54.4	18.5	1,1/2"
1,7/16"-12	1,3/16"-12	50.3	18.5	1,1/2"
1,7/16"-12	1,5/16"-12	50.3	18.5	1,1/2"
1,7/16"-12	1,5/8"-12	52.3	18.5	1,7/8"
1,11/16"-12	1,1/16"-12	56.4	24.1	1,3/4"
1,11/16"-12	1,5/16"-12	57.9	18.5	1,3/4"
1,11/16"-12	1,5/8"-12	52.3	18.5	1,7/8"
1,11/16"-12	1,7/8"-12	54.1	18.5	2,1/8"
2"-12	1,5/8"-12	59.7	18.5	2,1/8"
2"-12	1,7/8"-12	54.1	18.5	2,1/8"